


LIGHT FIXTURE SCHEDULE								
TYPE	DESCRIPTION	MANUF.	CATALOG NUMBER	MOUNTING	LAMPS			
					DESCRIPTION	COLOR TEMP.	MIN. CRI	BALLAST
" A"	8" APERTURE FLUORESCENT CAN LIGHT	LITHONIA	LF8118TRTF801AZ-MVOLT-GEB10	RECESSED	(1) 18W/TRT	3500	82	ELECTRONIC
" B"	4' FLUORESCENT STRIP *1	LITHONIA	C-132-MVOLT-AL-GEB10IS	SURFACE (IN COVE)	(1) 32W/T8	3500	84	ELECTRONIC
NOTES								


*1. MOUNTED IN COVE. REFER TO ARCHITECTURAL DRAWINGS FOR DETAIL.

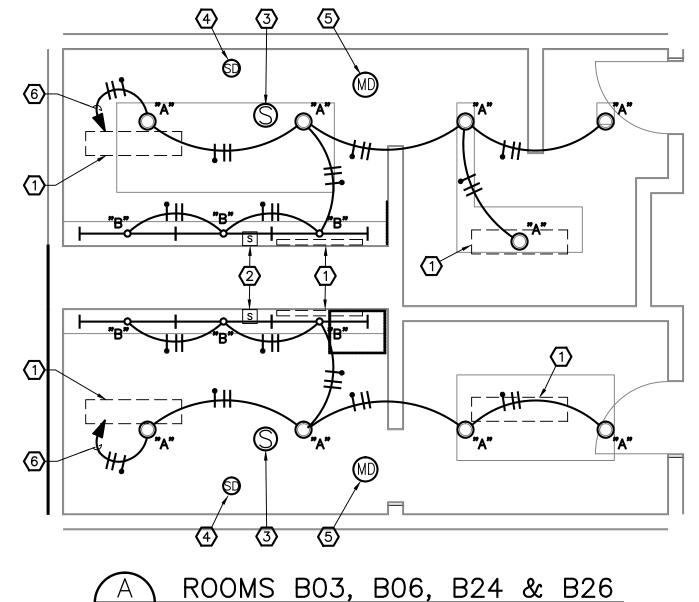


ROOMS B32 & B33

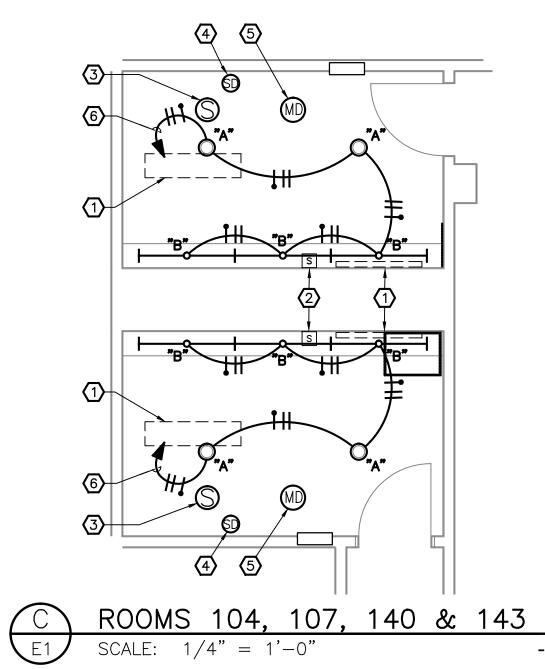

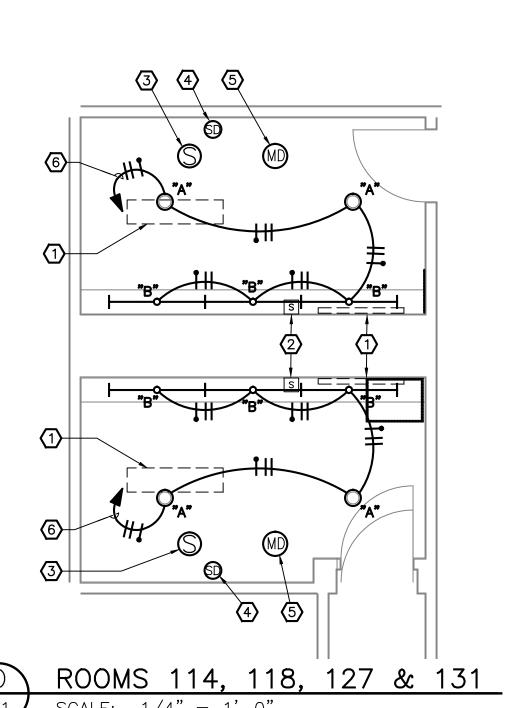

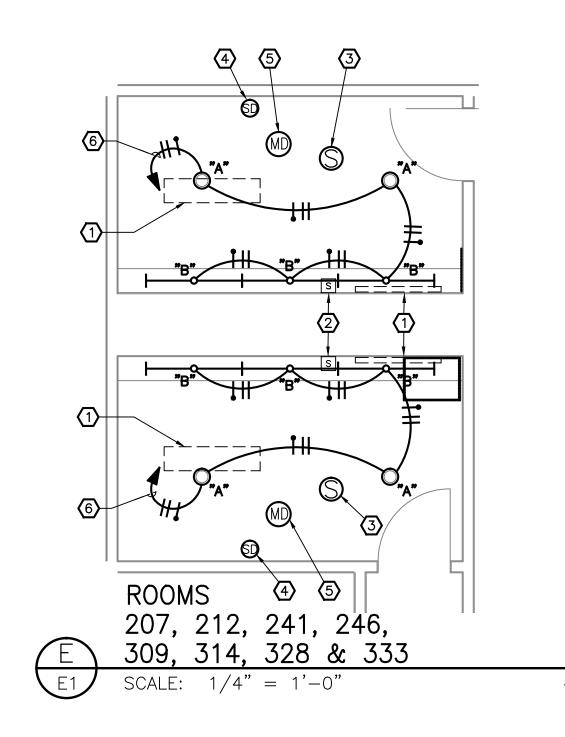

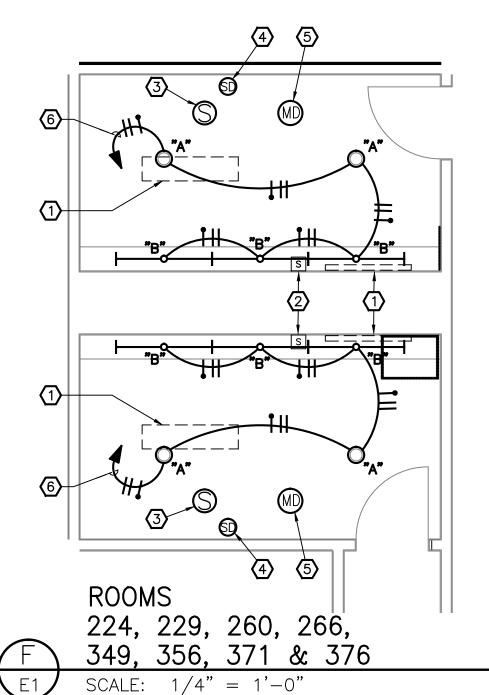

GENERAL NOTES:

- A. INTERIOR CONDUIT SHALL BE FLEX OR EMT. USE FLEX AS WHIPS TO LIGHT FIXTURES AND EMT IN ALL OTHER APPLICATIONS. 3/4" IS MINIMUM SIZE FOR EMT. #12 AWG IS MINIMUM WIRE SIZE FOR ELECTRICAL POWER. SET SCREW OR DIE CAST CONNECTORS ARE NOT ALLOWED. EACH CIRCUIT SHALL CARRY A SEPARATE NEUTRAL. NO SHARED NEUTRALS
- B. ALL WORK TO COMPLY WITH THE NEC AND LOCAL CODES IN WORKMANSHIP.
- C. LABEL ALL OUTLETS WITH PANEL NAME AND CIRCUIT NUMBER.
 UPDATE ALL PANELBOARD DIRECTORIES.
- D. FOR ALL DEMOLISHED CIRCUITS, REMOVE CONDUIT AND WIRING BACK TO SOURCE UNLESS OTHERWISE NOTED FOR REUSE IN NEW WORK.
- E. PROVIDE A PULL STRING IN ALL COMM. CONDUITS/RACEWAYS. COORDINATE WITH GOVERNMENT COMM PERSONNEL IN THE INSTALLATION OF THE COMM. WIRING. CONTRACTOR SHALL INSTALL WIRING AND CONNECT TO COMM OUTLET BEFORE PEDESTAL IS ATTACHED TO FLOOR DUCT. ALL NEW COMM. RACEWAYS TO EXTEND TO TELEPHONE CLOSET. (COORDINATE ALL WORK WITH FAA AMI)
- F. DRILLING OR OTHER NOISY CONSTRUCTION SHALL BE ACCOMPLISHED BEFORE 7am OR AFTER 4:30pm OR COORDINATED WITH GOVERNMENT.
- LOCATIONS SHALL BE DETERMINED AFTER FURNITURE IS INSTALLED. COORDINATE WITH INSPECTORS, COTR, OR PROJECT MANAGER.
- ADVISE AMI-400 AT 954-3651 PRIOR TO ANY
- TELECOMMUNICATIONS DEMOLITION IN THIS AREA.

 I. CUSTOMER TO SUBMIT A TELECOMMUNICATIONS WORK REQUEST

 3 WEEKS PRIOR TO MOVING PERSONNEL.
- . ALL TELECOMMUNICATIONS WORK SHALL BE IN ACCORDANCE WITH DIVISION 27 STANDARDS.

KEYED NOTES (⊕):

(<u>NOTE:</u> EXACT LOCATIONS OF THE FOLLOWING NOTED ITEMS VARIES SLIGHTLY BETWEEN TYPICAL RESTROOMS. LOCATIONS SHOWN ON THE DRAWINGS ARE APPROXIMATE)


- 1. REMOVE EXISTING LIGHT FIXTURE AND OFFER SALVAGE TO AMP-300 (PH. 954-3846) PRIOR TO DISPOSAL. EXISTING LIGHTING CIRCUIT, SWITCHES, CONDUIT, WIRING AND OCCUPANCY SENSORS SHALL REMAIN FOR CONNECTION TO NEW LIGHTING. REMOVE ANY PORTIONS OF THE EXISTING ITEMS THAT ARE NOT REUSED FOR NEW LIGHTING.
- EXISTING FIRE ALARM STROBE ON WALL SHALL BE REMOVED, PROTECTED, STORED, AND REINSTALLED AT SAME LOCATION, AFTER INSTALLATION OF NEW WALL COVERING.
- EXISTING PUBLIC ADDRESS SPEAKER SHALL BE REMOVED,
 PROTECTED, STORED, AND REINSTALLED AT SAME LOCATION, IN NEW
 GYP BOARD CEILING.
 EXISTING SMOKE DETECTOR SHALL BE REMOVED, PROTECTED,


STORED, AND REINSTALLED AT SAME LOCATION, IN NEW GYP BOARD

- CEILING.

 5. EXISTING OCCUPANCY SENSOR SHALL BE REMOVED, PROTECTED,
 STORED AND REINSTALLED AT SAME LOCATION IN NEW GYP BOARD.
- STORED, AND REINSTALLED AT SAME LOCATION, IN NEW GYP BOARD CEILING.
- 6. CONNECT TO EXISTING LIGHTING CIRCUIT AND SWITCHING.


SENSITIVE SECURITY INFORMATION WARNING: This record contains Sensitive Security Information that is controlled under 49 CFR parts 15 and 1520. No part of this record may be disclosed to persons without a "need to know", as defined in 49 CFR parts 15 and 1520, except with written permission of the Secretary of Transportation. Unauthorized release may result in civil penalty or other action. For U.S. government agencies, public disclosure is governed by 5 U.S.C. 552 and 49 CFR parts 15 and 1520.

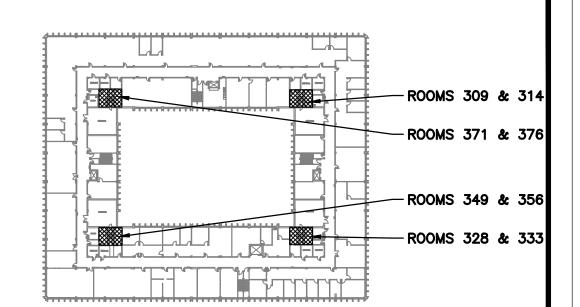








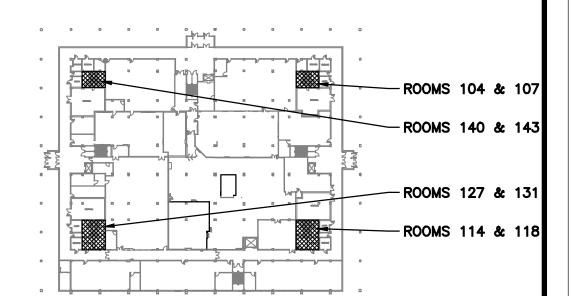



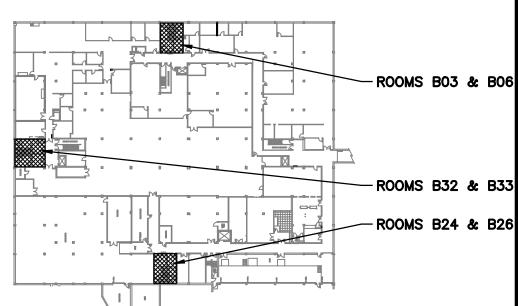



DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
MIKE MONRONEY AERONAUTICAL CENTER - OKLAHOMA CITY, OKLAHOMA

024-MPB
Room Numbers - Refer to Restroom Plans

Restroom Renovation

Electrical Plan

Work Request Construction No. 201001003

Work Request Construction No: 2010019038

PREPARED BY APPROVED BY

Todd Thomason Rodger Hefner

DESIGNED IT ISSUED BY OFFICE OF FACILITY MANAGEMENT AMP-400 DRAWN TO FACILITY MANAGEMENT AMP-400 DRAWING NO.

WORK ORDER NO. 10-019038 7 OF 7

(1) (6) (1)

ER\01_Sharedesign\2010 Work Orders\10-019038 MPB Restroom Renovation\Elec\10-019038_E1.dwg

CADUSER\01_SharedesIgn\2010 Work Orde