

AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT				1. CONTRACT ID CODE	PAGE 1	OF PAGES 6
2. AMENDMENT/MODIFICATION NO. <div style="text-align: center;">A001</div>		3. EFFECTIVE DATE <div style="text-align: center;">06/28/12</div>		4. REQUISITION/PURCHASE REQ. NO. <div style="text-align: center;">AC-12-03732</div>		5. PROJECT NO. <i>(If applicable)</i>
6. ISSUED BY FAA, MIKE MONRONEY AERONAUTICAL CENTER NAS CONTRACTING TEAM AMQ-210 P O BOX 25082 OKLAHOMA CITY OK 73125-4929				7. ADMINISTERED BY <i>(If other than Item 6)</i> FOR MORE INFORMATION CONTACT: Name: Lori Lemons Telephone No. (405) 954-5487		
8. NAME AND ADDRESS OF CONTRACTOR <i>(No., street, county, State and ZIP Code)</i> All Offerors				<input checked="" type="checkbox"/>	9A. AMENDMENT OF SOLICITATION NO. DTFAAC-12-R-03732	
					9B. DATED <i>(SEE ITEM 11)</i> 05/23/12	
				<input type="checkbox"/>	10A. MODIFICATION OF CONTRACT/ORDER NO.	
*TO BE COMPLETED BY VENDOR IF NOT COMPLETE					10B. DATED <i>(SEE ITEM 13)</i>	
CODE				FACILITY CODE		
11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS						
<input checked="" type="checkbox"/> The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offer is <input type="checkbox"/> extended <input checked="" type="checkbox"/> is not extended. NOTE: If offers are hand carried, additional time should be allowed to access the depository facility due to heightened security requirements. Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods: (a) By completing Item 8 and 15, and returning <u>1</u> copies of the amendment; (b) acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hours and date specified.						
12. ACCOUNTING AND APPROPRIATION DATA <i>(If required)</i>						
13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS, IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.						
A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: <i>(Specify authority)</i> THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT/ORDER NO. IN ITEM 10A.						
B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES <i>(such as changes in paying office, appropriation data, etc.)</i> SET FORTH IN ITEM 14,						
C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:						
D. OTHER <i>(Specify type of modification and authority)</i>						
E. IMPORTANT: Contractor <input type="checkbox"/> is not, <input checked="" type="checkbox"/> is required to sign this document and return 1 copies to the issuing office.						
14. DESCRIPTION OF AMENDMENT/MODIFICATION <i>(Organized by UCF section headings, including solicitation/contract subject matter where feasible.)</i>						
The Request for Offer referenced in Item 9A above for waterproofing of the ATCT in Sanford, FL is amended as follows: 1. Page 26 of the SIR/RFO is replaced by Page 26R to add Addendum One as an attachment. 2. Addendum One is added as an attachment to provide clarification and answers to questions from the site visit.						
Reference Item 11 above. Acknowledge receipt of this amendment to: FAA Bid & Proposal Officer (AMQ-100) Room 313, Multi-Purpose Building 6500 South MacArthur Boulevard (P.O. Box 25082, Zip 73125-4933) Oklahoma City, OK 73169-4933						
15A. NAME AND TITLE OF SIGNER <i>(Type or print)</i>				16A. NAME AND TITLE OF CONTRACTING OFFICER <i>(Type or print)</i>		
15B. CONTRACTOR/OFFEROR		15C. DATE SIGNED		16B. UNITED STATES OF AMERICA		16C. DATE SIGNED
BY _____ <i>(Signature of person authorized to sign)</i>				BY _____ <i>(Signature of Contracting Officer)</i>		

PART III - SECTION J
LIST OF ATTACHMENTS

<u>ATTACHMENT</u>	<u>TITLE</u>	<u>DATE</u>	<u>NO. OF PAGES</u>
1	Specification No.FAA-SO-42354	01/10/12	74
2	Drawing No. SO-D-102218-T-03	Various	5
3	Davis Bacon Wage Rate Decision, General Decision No. FL120038 Construction Type: Building	02/03/12	5
4	Standard Form 25, Performance Bond	05/96	2
5	Standard Form 25A, Payment Bond	10/98	2
6	Contractor's Release	05/05	1
7	Addendum One	06/28/12	1

DATE: June 28, 2012

SUBJECT: Addendum No. One to the Specifications and Drawings for the waterproofing of the ATCT in Sanford, FL.

This Addendum modifies and takes precedence over the original Specifications and Drawings and forms a part of the contract documents.

Add the following

1A.2 **SCOPE OF WORK**: The work consists of but is not limited to the following:

Some work must be done during a time when it does not interfere with the performance of the duties of the controllers at this facility.

Cab Roof: The work will be done at normal hours 7.30 AM to 4.00 pm. If the contractor is not using a crane to bring material to the cab roof then the delivery of the material need to take place between 11.00PM-6.00AM.

The parapet wall cap coating need to be take place after 6.00 pm.

The Catwalk elastomeric and grout work removal work need to be done between 11.00PM-6.00AM. The installation of the new material will be done during normal hours after air intakes and access opening are being seal.

The Base building Roof and exterior work: The work will be done during normal hours 7.30 AM to 4.00 pm.

Base Building Interior work can be done between 5.00PM-6.00AM.

Tower Interior work can be done at normal hours.

Cab Roof:

1. Clean existing roof surface, then clean, remove and reinstall to the side of the parapet wall the lightning arresters, associated clamps and cables on the cab roof. (Reuse the existing hardware and material but buy clip for the side installation)
6. Clean the two existing drain bowls, ring and cover strainer from any contaminant, then paint the rings and replace steel bolts with stainless steel ones. Replace the target sheet and seal the bowl with waterproof sealant recommended by the manufacturer
7. Install walkway pad in the same pattern as the existing. (Entire roof but do not cover the seams, cover strip & SEE SPECS and drawings)
8. Cover the parapet wall cap with Parapro 123 and any penetration need to be flash after the cap surface has been clean and rust remove.

Scope: Cab roof parapet wall cap needs to be cover with reinforce liquid coat resin. (Parapro 123by Siplast) As show in the enclose detail.

Material:

- a) Polyester Fleece 12" by 16'
- b) Activation resin
- c) PMMA flashing resin that cover 16 sq. ft. finish product
- d) Cleaning Solution/Solvent: A clear solvent used to clean and prepare transition areas of in-place catalyzed resin to receive subsequent coats of resin and to clean substrate materials to receive resin. Pro Prep by Siplast; Irving, TX

Application will be in the summer and need to meet the manufacturer recommendation.

Surface preparation:

8" around any penetration, seam and rusted pinholes. The surface need to be clean rust, old paint, grease or any contaminant. The surrounded eight inches around this of this area need to be bare metal.

The Metal Cap must be clean, of dry, loose material or any foreign material that would be detrimental the adhesion of the catalyzed primer. Remove rust or oxidation layer.


1. Lightly abrade surface prior to clean with pro prep.
2. Wipe down thoroughly with pro prep prior to coating. Allow 20 minutes of drying time after application before continuing. The coating should be completed within 60 minutes of cleaning with pro prep.

Installation : Fallow manufacturer direction at <http://freedownload.is/pdf/parapro-123-flashing-installers-guide-7015753.html>

Protection for the tower:

The time of application in the afternoon after 6.00 pm, surface preparation at normal hours.

All air intakes and opening the cab need to be close and seal when this work takes place.

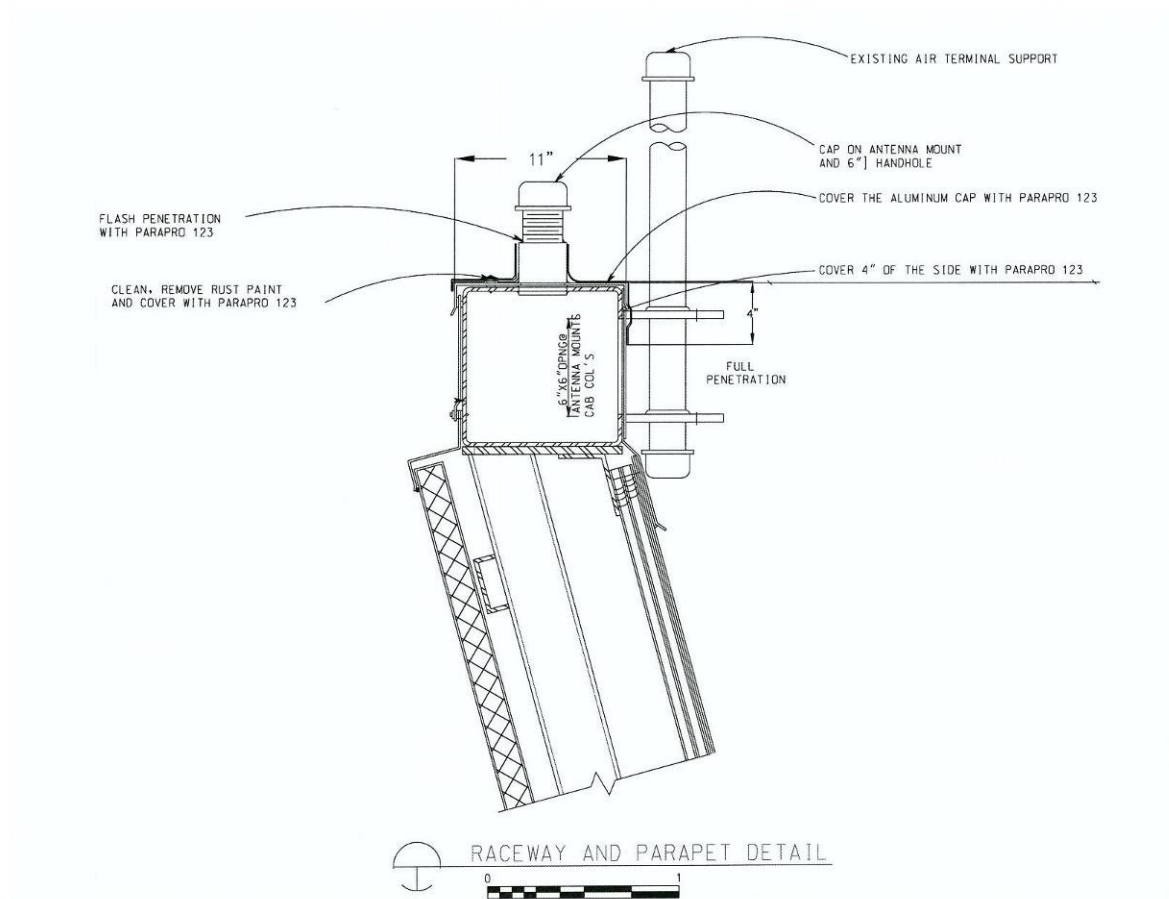

Clarifications

What areas need to be painted at the base building interior entrance?

Only the two columns that need the drywall replace. No hallway walls. Refer to Drawings.

Will we have electrical outlet in the cab?

The Cab roofs have a spec rated 120-20 amp outlet. If the contractor required 220 service we identified an electrical panel at the junction level. The contractor needs to contract a license electrician to install and remove the temporary service to our panel.