



NOTE: ALL PIPING SHOWN IS ABOVE FINISHED FLOOR

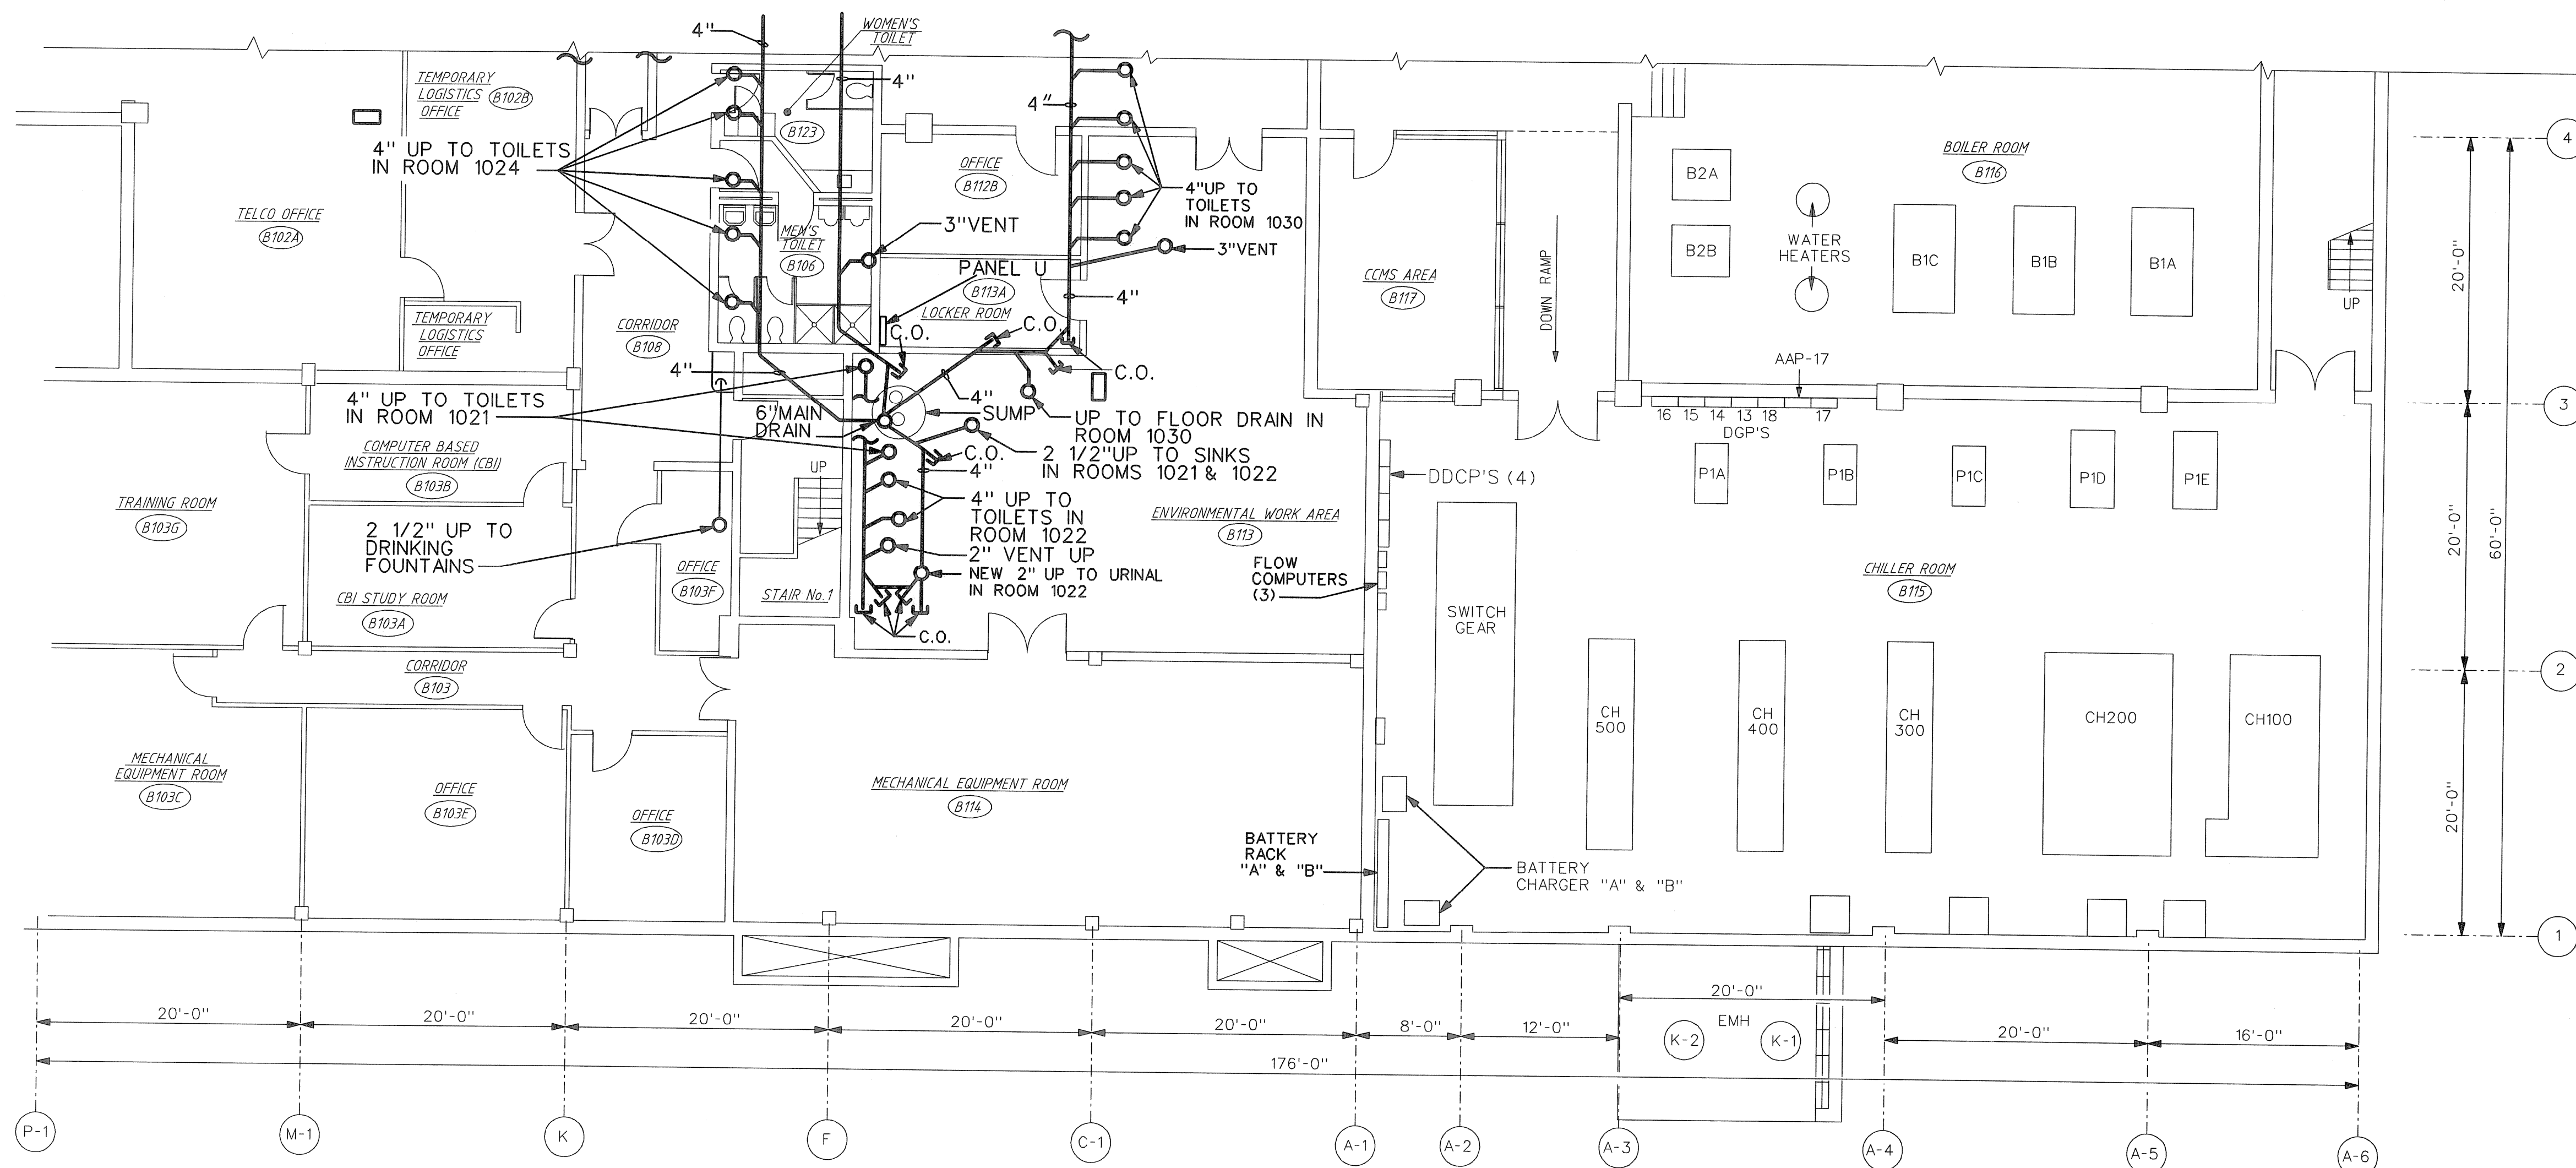

1 SANITARY SEWER PIPING, ADMINISTRATION WING BASEMENT NEW WORK

NOTES

1. INSTALL NEW SANITARY SEWER AND VENT PIPING AS SHOWN, ALONG WITH NEW PIPE SUPPORTS. NEW PIPING LAYOUT SHOWN IS APPROXIMATE AND CONTRACTOR SHALL FIELD VERIFY ALL LOCATIONS AND QUANTITIES OF ALL NEW PIPING REQUIRED TO BE INSTALLED WITH R.E.
2. CONTRACTOR SHALL PHASE DEMOLITION AND REPLACEMENT OF PIPING TO MINIMIZE DISRUPTION OF SERVICE TO FACILITY. NO MORE THAN ONE BATHROOM SHALL BE OUT OF SERVICE AT ANY ONE TIME IF AT ALL POSSIBLE. ALL PIPING TIE-INS AND DISRUPTIONS TO INDIVIDUAL SECTIONS OF SANITARY SYSTEM AND MAIN BUILDING SANITARY SEWER SERVICE SHALL BE SCHEDULED FOR AFTER HOURS AND/OR ON WEEKENDS. CONTRACTOR SHALL PERFORM AS MUCH PREPARATORY WORK AS POSSIBLE PRIOR TO SERVICE INTERRUPTIONS IN ORDER TO MINIMIZE DURATION OF SERVICE OUTAGES DURING PIPING REMOVAL AND TIE-INS. PROVIDE WRITTEN REQUEST FOR ALL PIPING TIE-INS AND SERVICE DISRUPTIONS A MINIMUM OF 14 DAYS IN ADVANCE OF PROPOSED DATE. COORDINATE WITH R.E.
3. PROVIDE ADEQUATE SUPPORT FOR PERSONNEL WORKING ON TOP OF EXISTING HARDBOARD PLASTER CEILINGS AND/OR REMOVE AND REPLACE EXISTING HARDBOARD CEILINGS AS NECESSARY TO REMOVE AND REPLACE PIPING.
4. INSTALL NEW HARDBOARD CEILINGS TO MATCH EXISTING CEILINGS THAT ARE REMOVED. FINISH AND PAINT TO MATCH EXISTING.

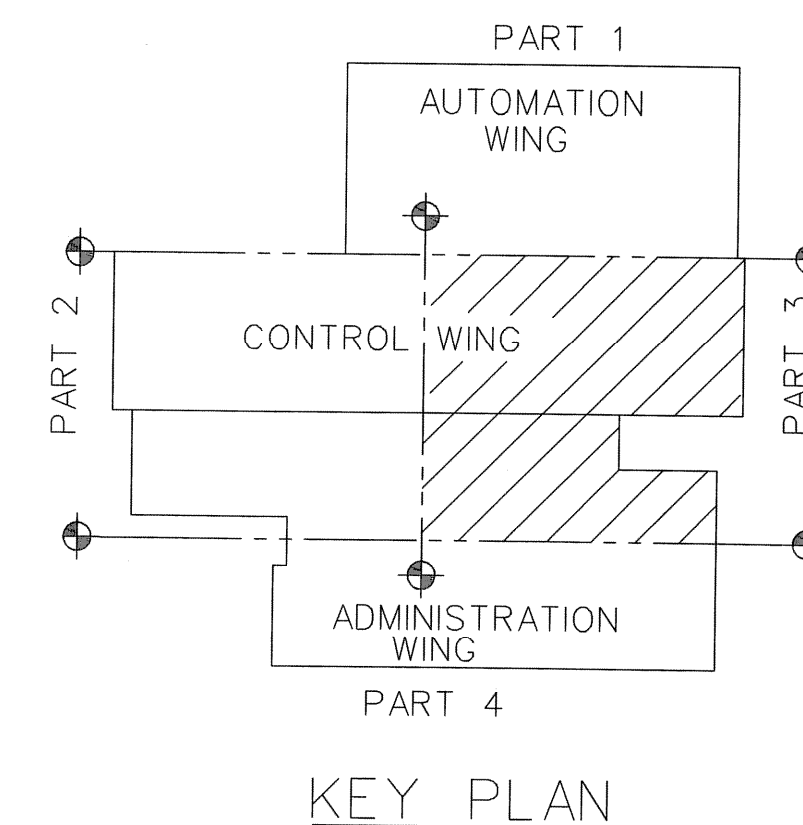

REV	DATE	DESCRIPTION	JCN	REDLINE DATE	APVD
A	12/15/2008	ENGINEERING REVISION (R. ESTRADA) NXS	622533	12/08/2008	CR
DEPARTMENT OF TRANSPORTATION FEDERAL AVIATION ADMINISTRATION ATO - TECHNICAL OPERATIONS EASTERN SERVICE AREA ARTCC STORM WATER PUMPS AND SEWER SYSTEM REPLACEMENT PROJECT ADMINISTRATION WING BASEMENT, NEW WORK					
HILLIARD JACKSONVILLE CENTER FL					
REVIEWED BY	SUBMITTED BY ORIGINAL SIGNED BY:		APPROVED BY ORIGINAL SIGNED BY:		
	Christopher G. Richard		Roberto Estrada, for		
DESIGNED	CR	ISSUED BY	DATE	JCN	622533
DRAWN	DS	ENGINEERING SERVICES	06/26/2008		
CHECKED		ENROUTE/FSS	DRAWING NO		REV
			ZJX-D-622533-M07		A