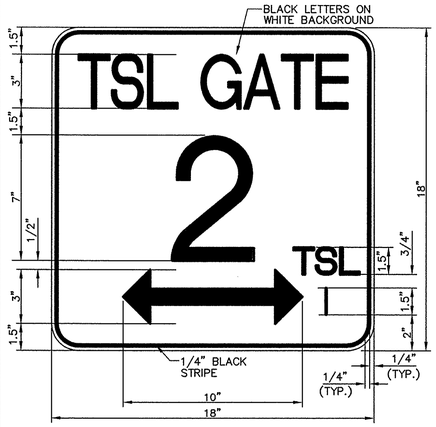

1 Q905 SIGN TYPE 1 (FRONT)
SCALE: 3" = 1'-0"

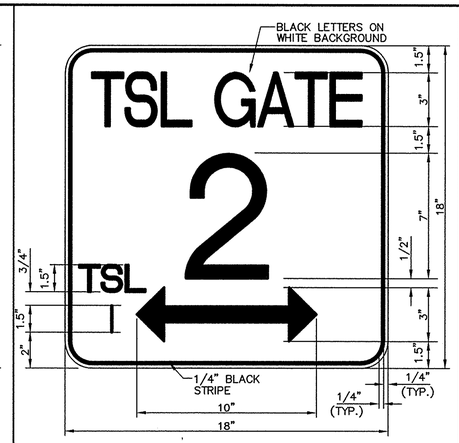

2 Q905 SIGN TYPE 1 (BACK)
SCALE: 3" = 1'-0"

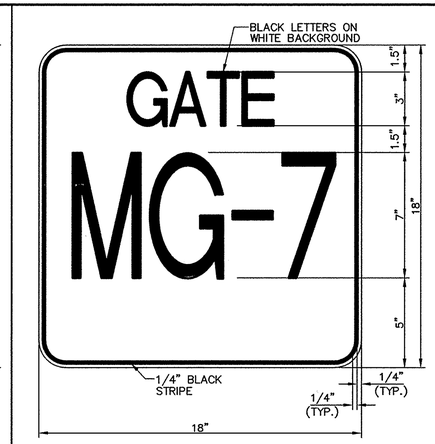

3 Q905 SIGN TYPE 2
SCALE: 3" = 1'-0"

4 Q905 SIGN TYPE 3
SCALE: 3" = 1'-0"

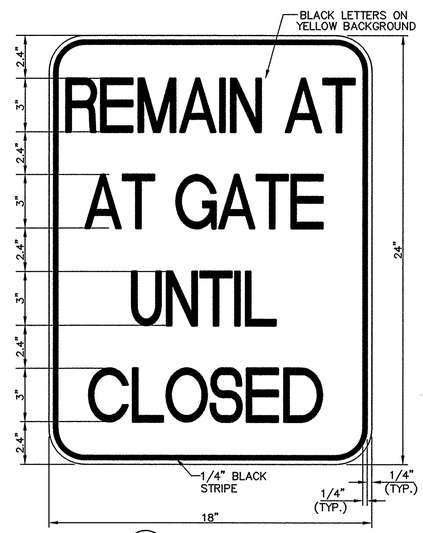

5 Q905 SIGN TYPE 4
SCALE: 3" = 1'-0"

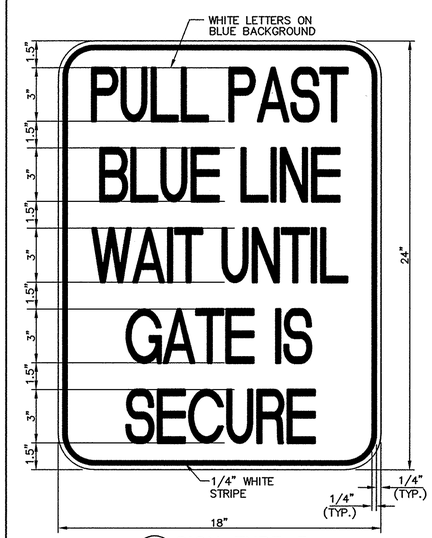

6 Q905 SIGN TYPE 5
SCALE: 3" = 1'-0"

SIGNAGE LEGEND

		SIGN TYPE	SIZE	QUANTITY	REMARKS	MOUNTING
1	TSL GATE 1	1	18" x 18"	1	BLACK ON WHITE PRINTED BOTH SIDES	GATE / 4 HOLES
2	TSL GATE 2	1	18" x 18"	1	BLACK ON WHITE PRINTED BOTH SIDES	GATE / 4 HOLES
3	GATE MG-7	2	18" x 18"	1	BLACK ON WHITE PRINTED BOTH SIDES	GATE / 4 HOLES
4	GATE MG-8	2	18" x 18"	1	BLACK ON WHITE PRINTED BOTH SIDES	GATE / 4 HOLES
5	VEHICLE GATE ONLY NO PEDESTRIAN TRAFFIC	3	24" x 24"	2	BLACK ON WHITE PRINTED BOTH SIDES	GATE / 4 HOLES
6	REMAIN AT GATE UNTIL CLOSED	4	18" x 24"	4	BLACK ON WHITE PRINTED BOTH SIDES	GATE / 4 HOLES
7	PULL PAST BLUE LINE WAIT UNTIL GATE IS SECURE	5	18" x 24"	4	WHITE ON BLUE	POST / 2 HOLES

NOTES

1. ALL SIGNS AND SIGN POSTS SHALL CONFORM TO "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES"; "NJ DOT STANDARD SPECIFICATION FOR ROAD AND BRIDGE CONSTRUCTION" SECTION 916; AND NJ DOT CONSTRUCTION DETAILS SHEET 62/117 63/117 72/117 & 73/117.
2. ALL SIGNS SHALL BE REFLECTIVE – ENGINEERING GRADE.
3. SIGN POSTS SHALL BE U-CHANNEL BREAKAWAY SYSTEM.
4. ALL EXTRA SIGNS, HARDWARE TO ATTACH SIGNS AND POSTS SHALL BE TURNED OVER TO FAATC.
5. COORDINATE EXACT SIGN LOCATION WITH FAATC COTR.

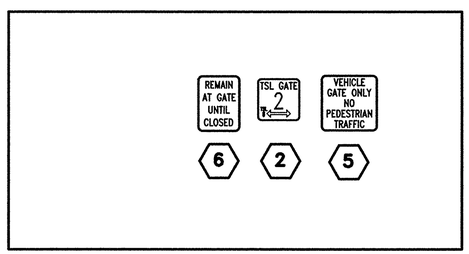

OUTBOUND VEHICLE GATE SIGN PLACEMENT

OUTBOUND PEDESTRIAN GATE SIGN PLACEMENT

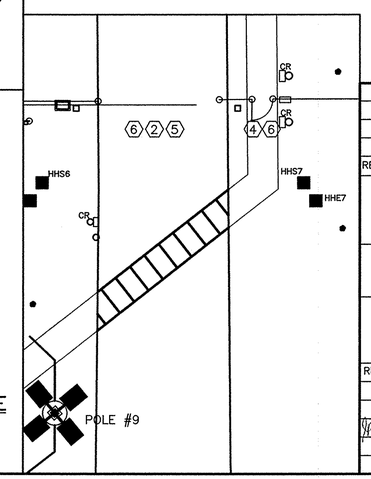

REV	DATE	DESCRIPTION	CHECK	APRV'D

UNITED STATES DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
WILLIAM J. HUGHES TECHNICAL CENTER
ATLANTIC CITY INT'L AIRPORT, N.J. 08405

315

REPLACEMENT OF OUTBOUND GATES

SIGNAGE DETAILS

REVIEWED BY	SUBMITTED BY	DATE	APPROVED BY	DATE
	Pete Saraceni	3/29/07	David Dando AJF-7545	3/29/07
	PETE SARACENI TSL ~~AJW~~ 1		DAVE DANDO AJP-7545	
AJW 3/26/07	DESIGN: WOLFEJ	ISSUED BY: FACILITY SERVICES & ENGINEERING DIVISION	DATE: 03/08/07	JCN:
	DRAWN: FOSTER J		DRAWING NO. 135999-Q905	SHEET # 8 OF 13
	CHECK:			